

# Home Electrical Wiring

Types of Receptacles and Wiring  
them for 120v – 15Amp/20Amp

# Understanding the wires

- You have 3 wires in a home electrical system;
  - Hot (Black wire) - dangerous one
  - Neutral (White wire)
  - Ground (bare copper or green wire).
- To make things work you need to have the **hot wire** and the **neutral wire** connected to the appliance (load).
- The neutral wire and the ground wire are actually one in the same. If you trace back to the breaker panel you will find that the two are connected together.
- The ground wire is used as a safety on loads where the enclosure is made of metal and the potential for electrical shock is present. If the hot wire shorts out some how, the ground wire which is attached to the metal will prevent you from getting electrocuted as electricity takes the path of least resistance.



# Wiring Size for Standard Circuits

(Bedroom, bathrooms, living room, etc)

- 14 gauge wire is the standard for 15amp circuits and 12 gauge is the standard for 20amp circuits.
- Wiring comes packaged in different sizes and number of conductors. The most common in a house are;

- 14/2 (black, white, bare)




- 14/3 (black, white, red, bare)




# Types of Electrical Device Boxes

- Metal vs Nonmetallic, that is the question.
- Nonmetallic is cheaper, non conductive, faster to install. Hit them too hard and they can crack or damage.
- Metal are stronger, can be added to, more designs.
- Regardless of type, they need to be grounded. There will be a screw located on the inside that the ground wire MUST always be attached to.

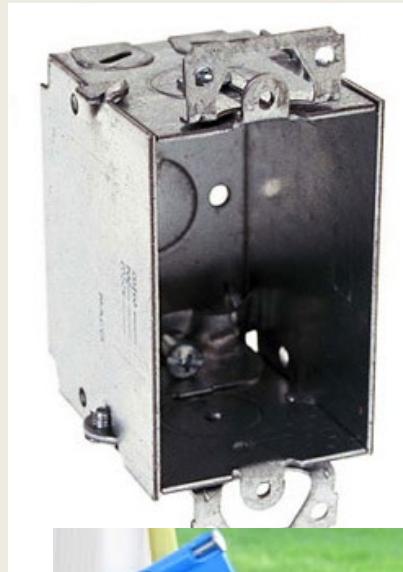


# Polarity of Receptacles

**Very old style** – Non-polarized, ungrounded, hot and neutral could be reversed. Potential of electrocution if hot wire is exposed or you touch it.

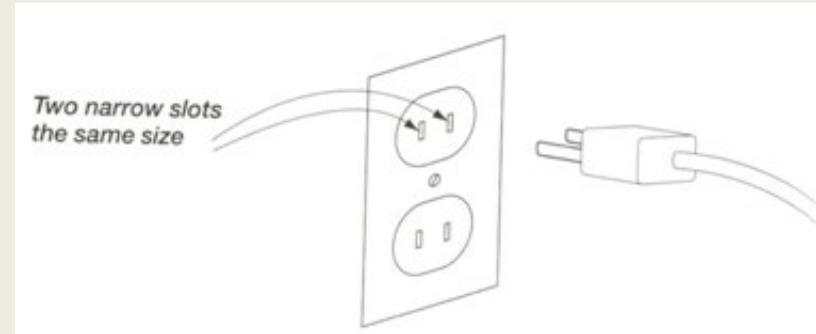


**Older Style** – Polarized but Ungrounded The wider slot is neutral, the narrow slot is the hot

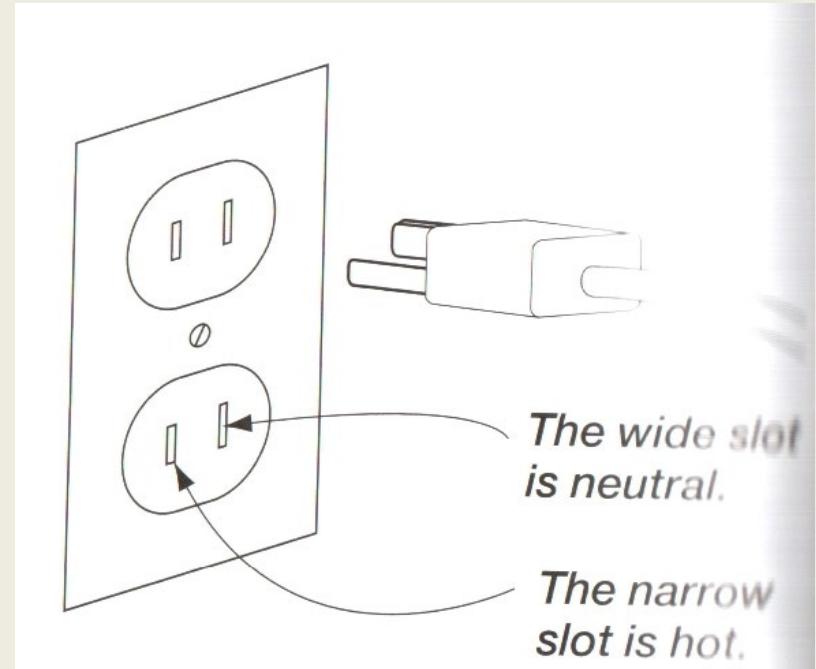

# Modern Receptacles

- **Modern Style –**  
Polarized and  
Grounded. The wider  
slot is neutral, the  
narrow slot is the hot.  
The ground pin forces  
proper polarity.
- \*\*Proper installation of  
a receptacle is with the  
Ground facing down!!

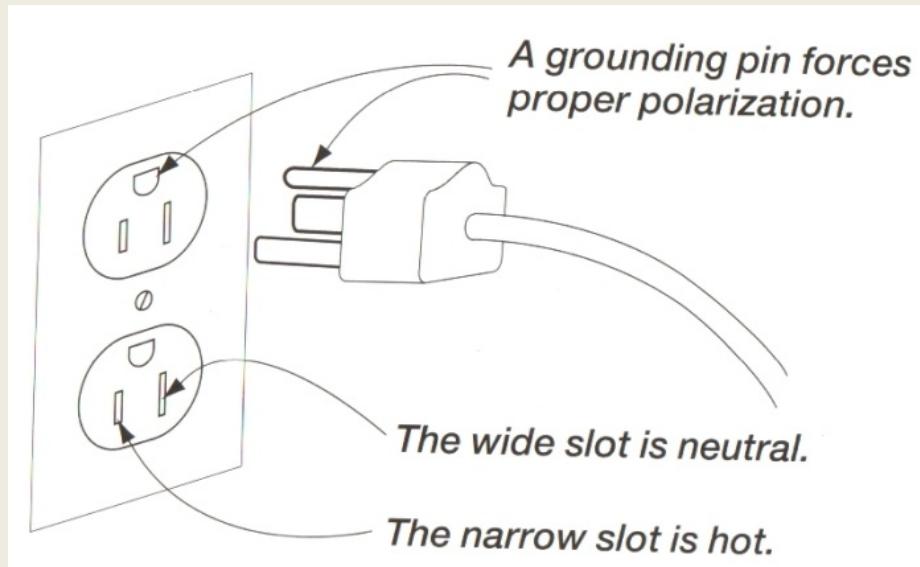

# Types of Receptacles



# Standard 15amp Receptacle

- Different quality, you get what you pay for.
- Cheap receptacles have plastic that breaks easily and have little metal.



# 20amp Receptacle

- A 20 Amp receptacle can be used for heavy duty appliances
- The additional horizontal slot ensures a 20Amp appliance can only be put into this receptacle
- A 20 amp circuit breaker will be installed in the service panel and a larger guage wire will be used
- Other appliances can still use this receptacle



# Ground-Fault Circuit Interrupt

- A GFCI compares the current running to the load (eg power tool) with the current coming from the load. They should be equal. If the 2 are different it will trip the circuit with as little as .006Amp.
- It trips in 1/25 to 1/30 of a second. You will still feel a mild shock (pin prick)
- Should be installed in kitchen, bathroom, decks, porches, garages, crawlspace, job site. Required in Bathroom or on kitchen counter tops near sink.





# Installing wires on a Receptacle


Hot (Black) is  
Brass screw

Neutral (White)  
is silver screw

Ground (Bare)  
is green screw

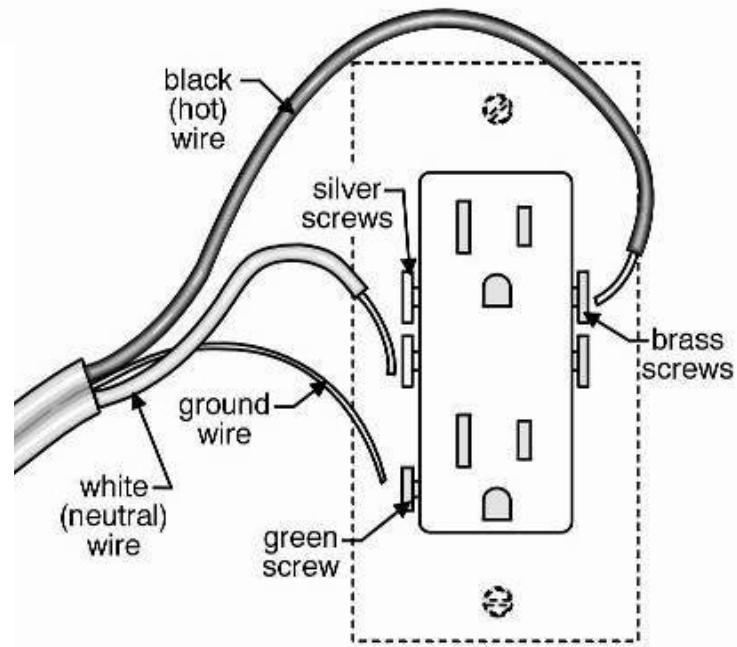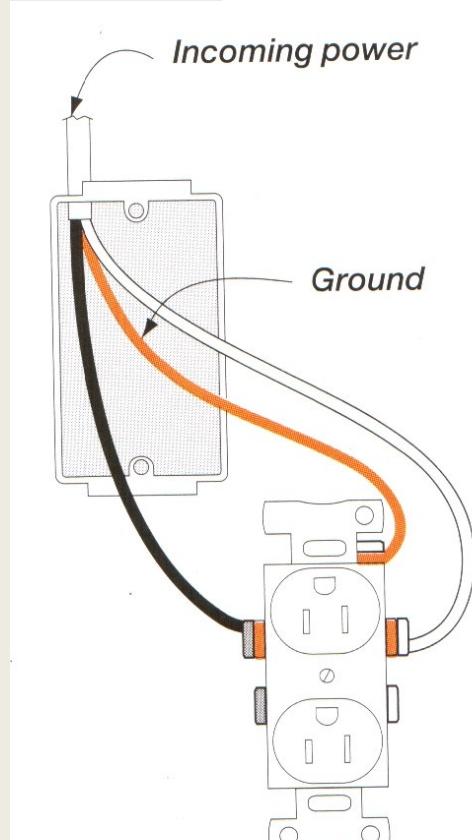

# Installing wires on a Receptacle

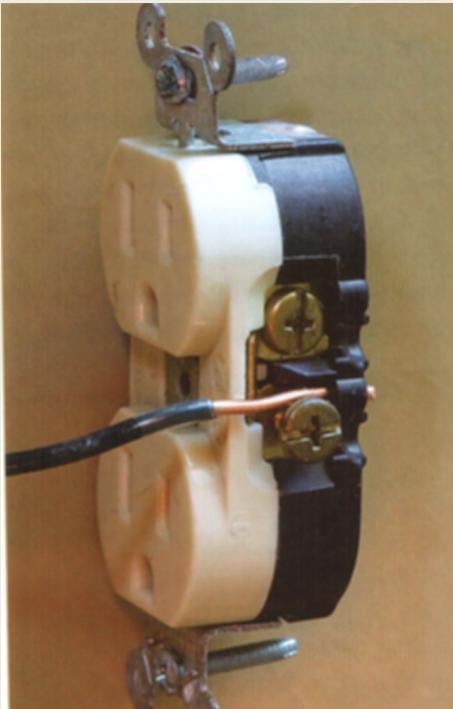

- Strip approximately 1" off the hot and neutral wires.
- Insert the wire from the front of the receptacle then bend it around the screw and out the back. Tighten the screw. Make sure there isn't any bare wire sticking out past the back of the receptacle.

# Connectors (Marrette)

- There are many different types of connectors. They are used to connect wires together in outlet boxes. In some cases you may have to use several in one box.
- The most common are twist on. You simple bare the wires you will be joining, twist them clockwise, then twist on a connector. Just make sure the plastic covers the exposed bare wire.

